


# MULTISTOP™ ONE

## Performance Board

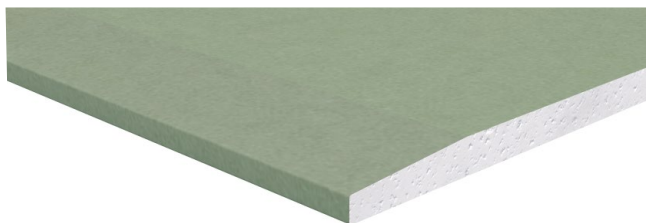

Feature	Specification
Nominal Thickness	13 mm & 16 mm
Edge Profile	Recessed edge
Paper Colour	Green
Nominal Mass	13 mm - 12.0 kg/m <sup>2</sup> 16 mm - 14.6 kg/m <sup>2</sup>
Fire Hazard Properties	Group 1 – as per the NCC Specification S7C4 Fire Hazard Properties – Walls and Ceilings, determined in accordance with AS 5637.1:2015
Combustibility	Non-combustible material as defined in NCC C2D10 Non-combustible building elements
VOC	Less than 0.5 mg/m <sup>3</sup> TVOC
Manufacture	Manufactured in Australia to the requirements of AS/NZS 2588:2018 Gypsum Plasterboard and in accordance with AS/NZS ISO 9001:2015 – Quality Management Systems – Requirements
Application	<ul style="list-style-type: none"> <li>Healthcare facilities: patient rooms, corridors, and wet areas</li> <li>Education buildings: classrooms, hallways, and amenities</li> <li>Public buildings: transport hubs, libraries, and civic centres</li> <li>Hotels and student accommodation: bathrooms, service areas, and shared spaces</li> <li>Aged care facilities: combining safety, durability, and hygiene control</li> </ul>

## Description

MultiStop ONE is an ideal solution for projects demanding multiple requirements from the internal linings incorporating fire, water, mould and impact resistance, and acoustic performance.

It is suitable for a wide range of wall and ceiling applications, ideal for hospitals, schools and environments where a high performance board is required.

## Advantages

- High impact resistance to incidental collision
- Fire resistance
- Water resistance
- Mould resistance
- High acoustic performance
- Suitable surface for tiling up to 32 kg/m<sup>2</sup>
- Lightweight construction
- GECA certified
- Environmental Product Declaration (EPD)
- Product Aware registered
- Climate Active Opt-In certified (Carbon Neutral)

## Limitations

- Should not be exposed to prolonged temperatures in excess of 52°C
- Not suitable for direct support of heavy loads

### Key



## Performance Details

### Fire Resistance

MultiStop ONE was fire tested and certified by BRANZ in accordance with AS 1530.4 to meet the requirements of the National Construction Code (NCC) and contributes to Fire Resistance Level when used in fire-rated systems.

Fire tested to achieve group number classification 1, the average specific extinction area less than the 250 m<sup>2</sup>/kg limit as defined by NCC.

### Water Resistance

MultiStop ONE is manufactured to exceed water resistant grade gypsum plasterboard requirements of AS/NZS 2588:2018 Gypsum Plasterboard.

Meets deemed to comply requirements of the NCC and AS 3740:2021 Waterproofing of domestic wet areas when installed to Knauf plasterboard wet area installation details.

### Mould Resistance

MultiStop ONE contains the added advantage of mould resistance and showed zero signs of mould growth when tested in accordance with ASTM D3273 and ASTM G21.

### Acoustic Performance

MultiStop ONE can provide required levels of sound insulation to achieve specified acoustic ratings when used in an acoustic system. Refer to Systems+ manual for information.

### Impact Resistance


- MultiStop ONE is subject to extensive hard body impact testing.
- Testing was conducted by a pendulum swing of a 100 mm diameter 4.0 kg steel ball on a 3.0m axis against the wall specimen
- An example of hard body impact is a bump by a hospital trolley or an intentional kick to wall surface
- Testing conducted by Knauf NATA accredited Laboratory. Resistance to Impact – Test Report No HB 20120415

### Structural


MultiStop ONE wall systems comply to the relevant Deemed-to-Satisfy provisions of NCC Specification 6 Structural Tests for Lightweight Construction.

- Exceeds compliance criteria for NCC resistance to impact test to ASTM E695-03
- Exceeds compliance criteria for NCC resistance to static pressure test to ASTM E72-15

### Size of Surface Indentation for Hard Body Impact

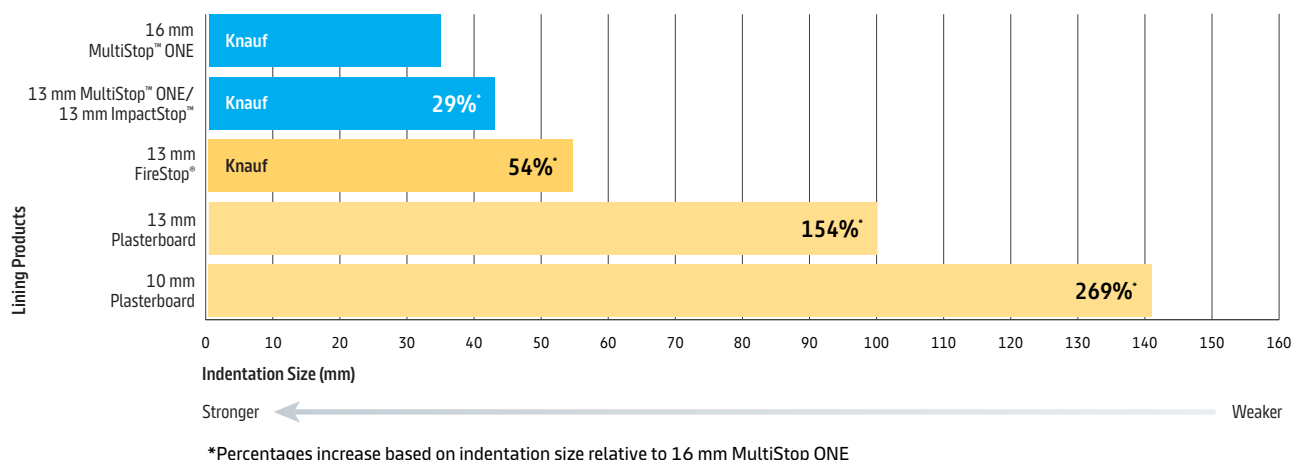

### Depth of Surface Indentation for Hard Body Impact

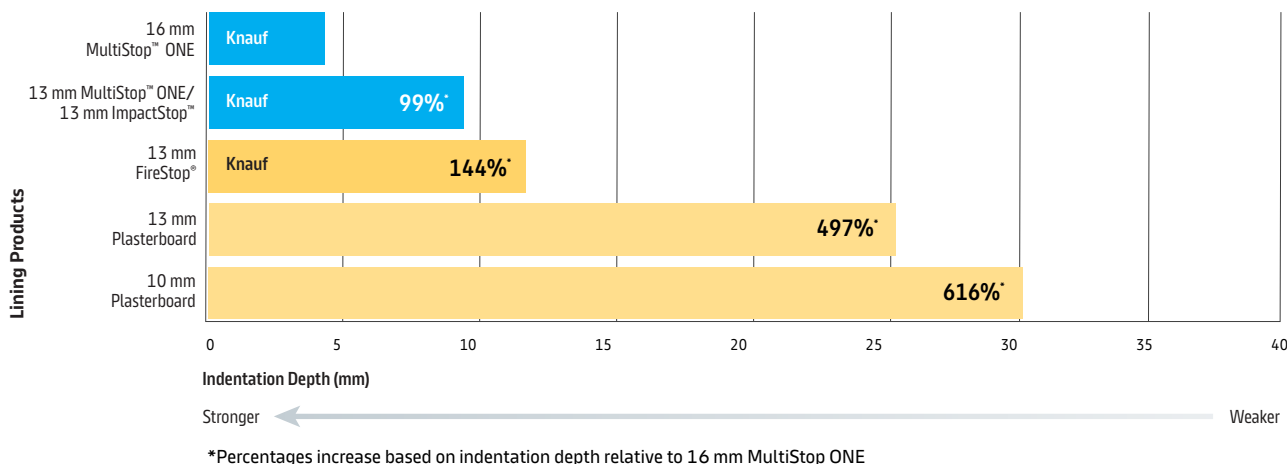

## Installation, Jointing and Finishing

Knauf has a comprehensive range of jointing and adhesives compounds in premixed or powder form to meet market needs and varying climatic conditions. Apply appropriate painting system or other finishes as recommended for the required level of finish and application. This product data sheet does not provide plasterboard installation, jointing and finishing details. Refer to Knauf Plasterboard Installation Manual or [knauf.com](http://knauf.com) for further information.

## Indoor, Environment, Quality

Knauf plasterboard products, compounds and adhesives have been independently tested to confirm compliance with Green Star specification limits for VOCs and formaldehyde.

## References

For detailed information on Volatile Organic Compound (VOC) emissions and fire test reports, please visit [knauf.com](http://knauf.com)

## Safety and First Aid

For detailed safety information, including handling, storage, and first aid guidance, please visit the relevant product page on [knauf.com](http://knauf.com) to access the safety data sheet and additional resources.

## Sustainability

Knauf plasterboards are manufactured from a combination of natural gypsum, and paper liner made from reclaimed and recycled paper waste. Plasterboard waste can be reclaimed and recycled into new plasterboard or reused as soil conditioner.

Knauf MultiStop ONE is listed in Product Aware and has GECA, Climate Opt-In certification and independently verified EPD that may contribute to Green Star credit points. For more information refer to Green Building Council of Australia.



### Technical Resources



Plasterboard  
Installation  
Manual



CAD Library



eSelector

### Technical Assistance

TecASSIST™ 1800 811 222

[knauf.com](http://knauf.com)

### Sales Enquiries

1800 003 377

©2025 Knauf Gypsum Pty Ltd. All rights reserved. The trademarks Knauf, Build on us, MultiStop, Systems+, eSelector and TecASSIST are trademarks of Knauf Gypsum Pty Ltd or one or more of its affiliates including Knauf Gips KG. Knauf Gypsum Pty Ltd. ABN 84 004 231 976. 3 Thackeray Street, Camellia NSW. This product datasheet is intended to provide general information on plasterboard products and should not be used as a substitute for professional building advice. We recommend you use a qualified person to install Knauf plasterboard. To ensure the information you are using is current, Knauf recommends you review the latest building information available on the Knauf website [Knauf.com](http://Knauf.com). 24/09/2025\_GYAU250819/04